

FLUSHMOUNT WINDOWS

275 DOUBLE PANEL SLIDER

For retail operators who need the flexibility to work out of either side of the window. No matter where your customer pulls up to the window, they can be serviced easily and efficiently.

PRODUCT DESCRIPTIONS

3 Standard Sizes Available

- 47 1/2"W x 43 1/2"H with 19"W x 36"H service opening
- 47 1/2"W x 35 3/4"H with 19"W x 28"H service opening

2 Standard Modes of Operation

- Manual Oper/Self Closing

So simple to operate, the service door opens effortlessly and automatically slides shut when operator releases the handle.

- Manual Oper/Manual Close

For total control over the operation of the window.

Note: When one side of window is open, the other side automatically locks.

Quality Construction

Anodized aluminum extrusions, stainless steel and 1/4" tempered glass combine to give you an attractive window that not only enhances building exteriors, it will not rust, pit or weather. Track free bottom sill provides for a contaminant free surface.

Double Security Locks

The 275 Double Panel Slider automatically locks each time the window closes, providing security when the window is left unattended. When the drive-thru is closed, manual security locks help prevent outside entry. In high risk locations, an optional security bar set is available to discourage and prevent after hours break-ins.

Unique Design

Bottom sill is angled downward to provide protection against the elements such as rain, sleet, and snow.

Standard Options


The 275 Double Panel Slider is available in statuary bronze, champagne or clear anodized aluminum.

Custom Options

- Tinted glass is available upon request.
- Powder coat painting is available in a wide range of custom colors.



Window must be installed square and plumb, however this window comes equipped with an "adjustable track" to aid in the installation alignment process.

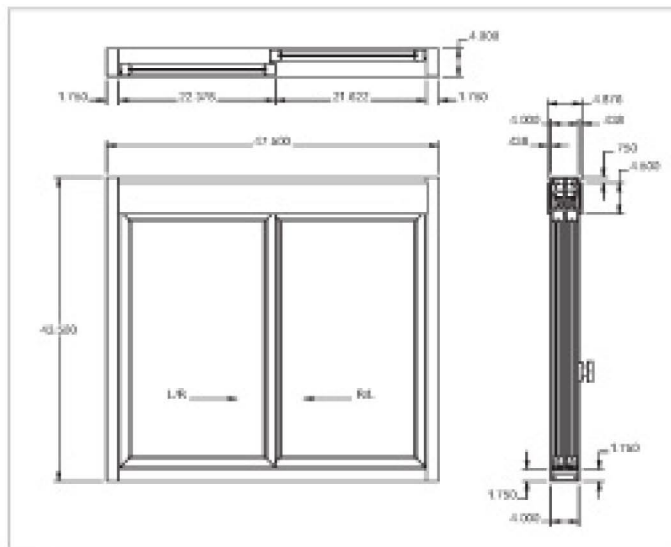

47-1/2"W x 43-1/2"H

Service Opening

19"W (483 mm) x 36"H (914 mm)

Glazing Rough Opening

47-3/4"W (1213 mm) x 43-3/4"H (1111 mm)

Masonry Rough Opening

48"W (1219 mm) x 44"H (1118 mm)

47-1/2"W x 35-3/4"H

Service Opening

19"W (483 mm) x 28"H (711 mm)

Glazing Rough Opening

47-3/4"W (1213 mm) x 36"H (914 mm)

Masonry Rough Opening

48"W (1219 mm) x 36-1/4"H (921 mm)

