

The 603 Walk Up includes a speaker hole and deal tray for paper, ticket, or payment transactions. It provides ample visibility while keeping the attendant secure and protected.

Ideal for a variety of applications including government buildings, amusement parks, banks, convenience stores, theaters, race tracks, stadiums, park districts and zoos.

### CHOOSE THE APPROPRIATE GLASS FOR YOUR SITE:

- ◇ **NON-IMPACT** 1/4" clear tempered glass w/ aluminum speak thru
- ◇ **IMPACT RESISTANT SECURITY** 3/4" Smash & Grab impact rated Lexan with Lexan speak thru (note: this model not tested for Hurricane)
- ◇ **BULLET RESISTANT SECURITY**
  - 3/4" Lexan Level 1 Bullet Resistance w/ Lexan speak thru
  - 1 1/4" Lexan Level 3 Bullet Resistance w/ Lexan speak thru

### SIZE

All standard sizes include 12 1/4" deep stainless steel shelf with built in deal tray and inside tray cover. Deal tray is 12" wide x 1 7/8" deep.


Overall frame size including deal tray:

- ◇ 25 3/4" W x 42"H
- ◇ 36"W x 36"H

Custom sizes available upon request. Shelf/deal tray sizes are fixed, but window frame can be adjusted. Must be at least 25 3/4" wide.



Aluminum Speak Thru



Lexan Speak Thru



SS Speak Thru



Interior Tray Cover

### STANDARD FEATURES:

- ◇ Anodized aluminum extrusions and stainless steel combine to give you an attractive window that will not rust, pit or weather
- ◇ Fully assembled, pre-glazed and ready to install
- ◇ Dark Bronze or Clear Anodized Aluminum
- ◇ SS deal tray with inside tray cover
- ◇ Speak thru
- ◇ One year parts & labor limited warranty
- ◇ On-staff tech support / stocked parts / nationwide network of service providers

### OPTIONAL FEATURES

Glazing:

- 1/4" Clear Tempered Glass
- 3/4" Smash & Grab Lexan
- 3/4" Lexan Level 1 Bullet Resistance
- 1 1/4" Lexan Level 3 Bullet Resistance
- ◇ SS Speak Thru
- ◇ Powder Coat Paint—Tiger Drylac
- ◇ Amplified Speaker System—Haven SC100
- ◇ Custom Sizes




DRAWING OF 603 WALK UP 25 3/4" W x 42"H

All windows are shipped completely pre-assembled, fully glazed and ready to install.


Installation / Owners manual can be retrieved online:

[www.ready-access.com](http://www.ready-access.com)

- ◇ Installation illustrations are for reference only. Construction conditions and local codes prevail.
- ◇ Must be installed level, square and plumb.
- ◇ No power required

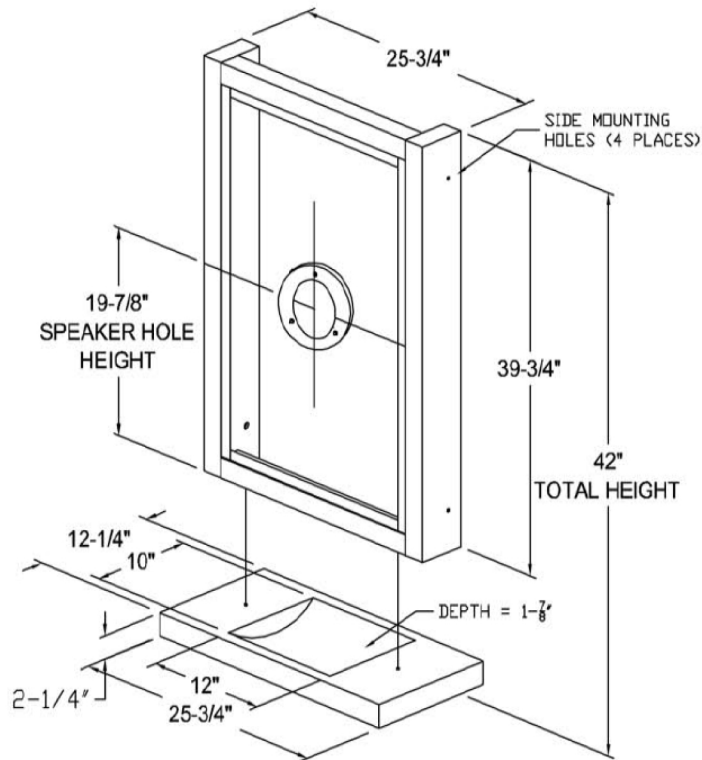

SIDE VIEW

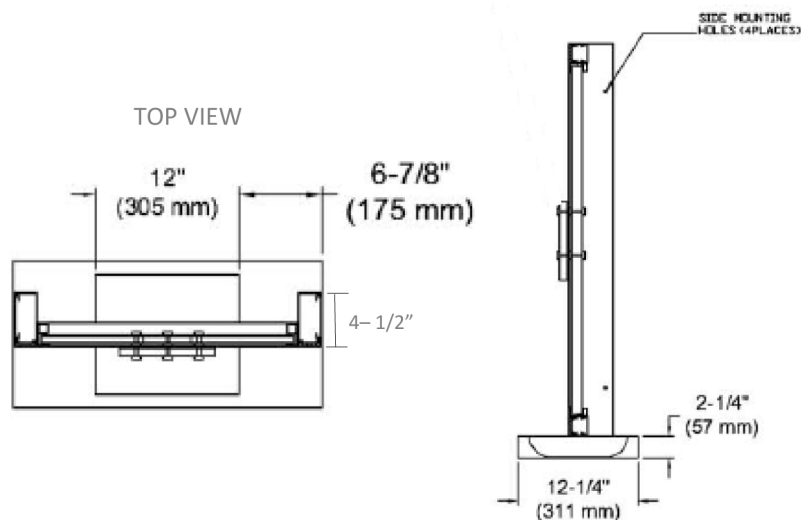

### ROUGH OPENING

Rough opening should be 1/2" larger than frame size to allow for shimming. (defer to preference of glazer if mounting in storefront)

For interior counter sill height of 36", rough opening should be set 33 1/2" H from interior finished floor.

- ◇ 25 3/4" W x 42"H  
Rough Opening 26 1/4"W x 42 1/2"H
- ◇ 36"W x 36"H  
Rough Opening 36 1/2"W x 36 1/2"H