

What the

BEST DRESSED

Drive-thru is Wearing



131 BI-PARTING SLIDING WINDOW With Attached Split Transom

The 131 Bi-Parting Window is the perfect enhancement to the drive-thru concept, offering unobstructed views of customer and crew.

This attractive and economical window is ideal for a drive-thru or walk up application. The large service opening is suitable for both large and small operations.

PRODUCT DESCRIPTIONS

- **Manual or Fully Automatic Electric Opening**

In a manual operation, the inside attendant pulls the door handle, and both doors part from the center to either side. With a fully automatic electric operation, the operator simply steps into the presence sensor and the moveable door panels slide open. When the operator steps out of the presence sensor, the moveable door panels automatically close. The range for the presence sensor is adjustable to specific customer needs.

- **Integrated Split Transom**

This uniquely designed attached split transom offers a center opening for the Ready Access AA100 fly fan. The unit comes fully assembled and ready to install. Once the window is installed, the AA100 fly fan is then installed in the unglazed center opening and you now have a unit that is fully health code compliant.

- **Adjustable Service Opening**

Operators can easily adjust the window for two convenient opening sizes at any given time. By simply pressing a button the doors will open to either a 12"W or 18"W serving area.

- **Quality Construction**

Anodized aluminum extrusions, stainless steel and 1/4" tempered glass combine to give you an attractive window that not only enhances building exteriors, but will not rust, pit or weather. Track free bottom sill provides for a contaminant free surface.

- **Double Security Locks**

The 131 Bi-Parting Slider automatically locks each time the window closes, providing security when the window is left unattended. When the drive-thru is closed, manual security locks help prevent outside entry.



- **Fully Assembled, Ready to Install**

Ready Access windows are shipped completely preassembled, and fully glazed for lower installation costs. Normal installation takes less than two hours.

- **Warranty and Service Support**

Your Ready Access window comes with a one year limited warranty on parts and labor provided by a worldwide service organization.

- **AVAILABLE OPTIONS**

The 131 Bi-Parting Slider is available in statuary bronze or clear anodized aluminum.

Standard window dimensions are:

53 1/2"W x 37 3/4"H (18"W (adjustable to 12"wide) x 31"H service opening. Overall window dimensions with attached split transom: 53-1/2"Wx51-1/2"H.



An stainless steel shelf and air shield switch are also available.

- **CUSTOM OPTIONS**


- Custom heights are available in both manual and electric operations.
- Tinted glass is available upon request.
- Powder coat painting is available in a wide range of custom colors.

ARRIVES READY FOR INSTALLATION

Your Ready Access window is shipped completely assembled and ready for installation. Comes with instructions.




131 BI-PARTING SLIDING WINDOW With Attached Split Transom

Manual operation or Fully-automatic operation

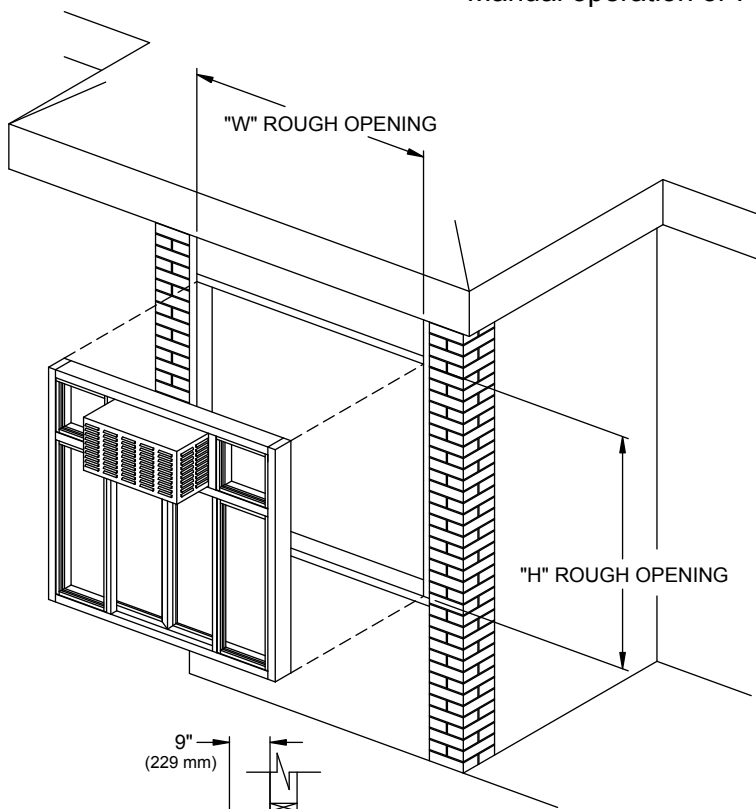

131 - 53-1/2"W x 51-1/2"H

Glazing Rough Opening =
53-3/4"W (1365 mm) x 51-3/4"H (1315 mm)
Masonry Rough Opening =
54"W (1372 mm) x 52"H (1321 mm)

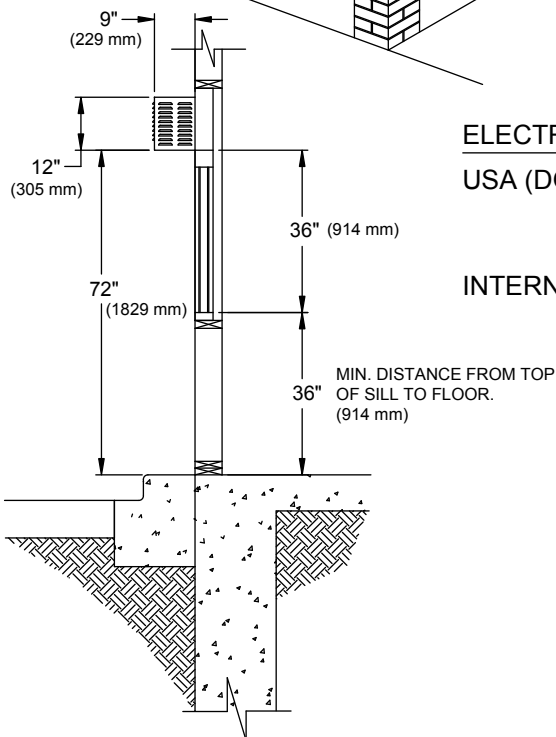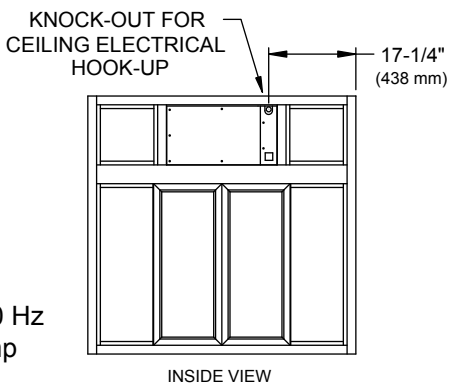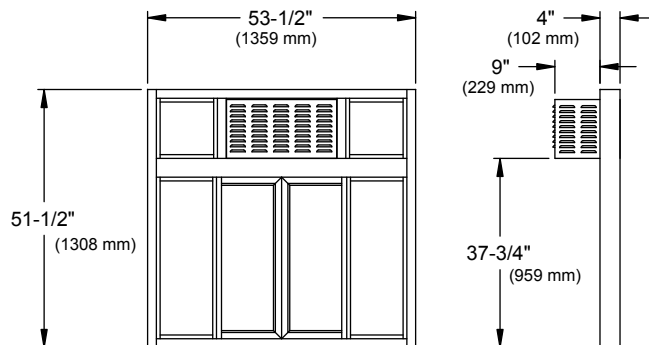

ELECTRICAL REQUIREMENTS

USA (DOMESTIC) : 115 vac - 60 Hz
WITH A 15 amp
BRANCH CIRCUIT

INTERNATIONAL : 220/240 vac - 50/60 Hz
WITH A MAX. 8 amp
BRANCH CIRCUIT

SERVICE OPENING = 18"W x 31"H

SERVICE OPENING ADJUSTS TO 12"W
FROM THE PUSH OF A BUTTON.

AIR SHIELD = 600 FPM AIR VELOCITY

Custom heights and colors available.
Please contact Ready Access for more information.

Window must be installed square and plumb.

Installation illustrations are for reference only. Construction
and local codes will determine proper installation of window.

Contact Ready Access for more information on installation.

