600 Single Panel Slider

The 600 series Single Panel Slider is specified by many multi-unit operators for its quality construction and adaptability to site-specific needs.

Choose the appropriate glass for your site:

600 INSULATED The 600 series comes standard with 3/4" insulated glass.

600 ENERGY SAVER Choose "Solarban 70XL Insulated Low-E" glass to maximize energy-efficiency and staff comfort. Estimated to save 33% on energy costs associated with the window. NFRC Rated.

600 HURRICANE Choose Smash & Grab Impact Rated Glazing (Miami Dade NOA 16-0307.06 – Impact)

600 SECURITY Choose Lexan Level 1 Bullet Resistant or Smash & Grab glass, and a security bar set for protection against forced entry.

Choose your mode of operation

◊ MANUAL OPEN / SELF CLOSE
Manual open, with patented hands-free gravity close. Economical and easy to maintain.

◊ MANUAL OPEN / ELECTRONIC RELEASE (MOER)
Electromagnetic "hold open" feature paired with a presence sensor offers the control of manual open with a gravity-fed close that won't release while interacting with customers. Hands free interaction that is easy to maintain.

◊ ELECTRIC
Fully automatic electric, for hands free open & close. Operator steps into adjustable overhead beam to activate.

Pictured: left to right from outside view, clear anodized finish.

SIZE

◊ 47 1/2"W x 43 1/2"H x 4 1/2"D (Service Opening: 19"W x 35" H)

◊ 47 1/2" x 35 3/4" x 4 1/2"D (Service Opening: 19"W x 27"H)
(15" west coast restricted service opening also available to meet CA restricted opening requirement—under 432 square inches)

STANDARD FEATURES:

◊ Anodized aluminum extrusions and stainless steel combine to give you an attractive window that will not rust, pit or weather
◊ Fully assembled, pre-glazed and ready to install
◊ 3/4" Insulated Glass
◊ Dark Bronze or Clear Anodized Aluminum
◊ Self latches every time it closes. Also includes a thumb turn lock, and night locking bar
◊ Track free bottom sill provides for a contaminant free surface. Angled toward outside for drainage toward exterior
◊ One year parts & labor limited warranty
◊ On-staff tech support / stocked parts / nationwide network of service providers

OPTIONAL FEATURES

Glazing:
- ◊ Solarban 70 XL Insulated Low E
- ◊ Smash & Grab
- ◊ Lexan Level 1 Bullet Resistant
- ◊ Tinting

◊ Powder Coat Paint—Tiger Drylac
◊ Stainless Steel Shelf to extend sill inside or out (13 ga.)
◊ Telescoping Night Time Security Bar Set for additional security
◊ AA300 Heated Air Curtain
◊ Split Transom with AA100 Fly Fan
◊ Solid Glass Transom
◊ Restriction Panel or Screen
◊ Hipscan Presence Sensor ILO Overhead Beam

1815 Arthur Drive West Chicago, IL 60185 800.621.5045 630-876-7766 (fax) 630.876.7767
www.ready-access.com email: ready@ready-access.com

600 Single Panel Slider

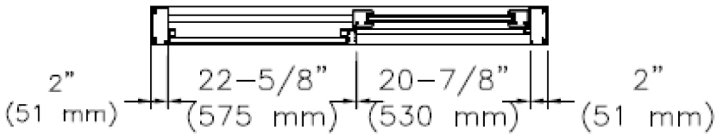

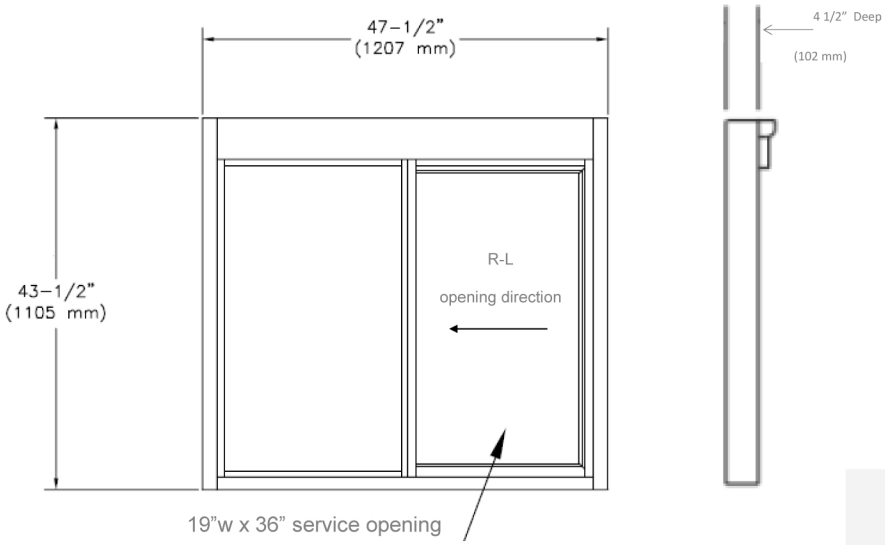

Specify opening direction from outside view
Left to Right or Right to Left

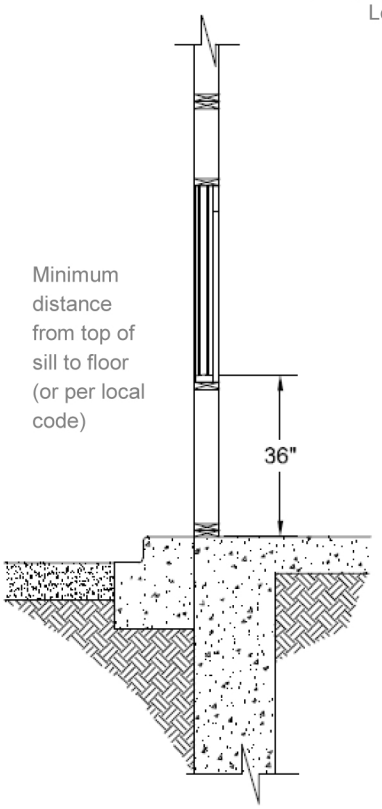

ROUGH OPENING

47 1/2" W x 43 1/2" H

- Masonry Rough Opening –48"W (1219 mm) x 44"H (1118 mm)
- Glazing Rough Opening - 47 3/4"W (1213 mm) x 43 3/4"H (1111 mm)

47 1/2" W x 35 3/4" H

- Masonry Rough Opening –48"W (1219 mm) x 36 1/4"H (921mm)
- Glazing Rough Opening - 47 3/4" W (1213 mm) x 36"H (914 mm)

All windows are shipped completely pre-assembled, fully glazed and ready to install.

Installation / Owners manual can be retrieved online:
www.ready-access.com

- Installation illustrations are for reference only. Construction conditions and local codes prevail.
- Must be installed level, square and plumb.

ELECTRIC REQUIREMENTS

Run power to header on fixed panel side

Manual Open / Electronic Release & Fully Automatic Electric:

115 vac—60Hz with a 15 amp dedicated circuit

Manual Open / Self Close Window:

No Power Required

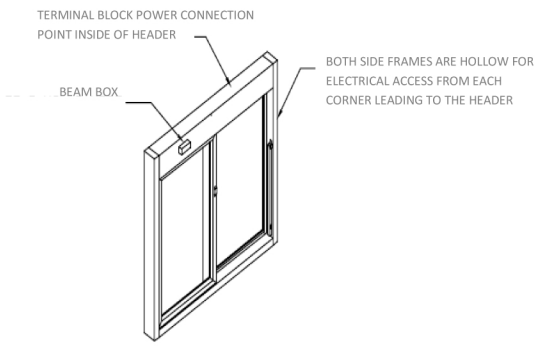

1815 Arthur Drive West Chicago, IL 60185 800.621.5045 630-876-7766 (fax) 630.876.7767
www.ready-access.com email: ready@ready-access.com