

Perfect for walk-up applications, the 550 features two service openings in one window. There is a fixed center pane with two independently operating panels that slide toward the center.

Ideal for walk-up restaurant service, concessions, tickets, food trucks, or interior office and pharmacy.



### Choose your mode of operation

#### ◇ MANUAL OPEN / SELF CLOSE

Manual open, with patented hands-free gravity close. Economical and easy to maintain.

#### ◇ MANUAL OPEN / MANUAL CLOSE

For complete control of the window, choose manual open/manual close. This mode of operation is best for paper transactions. Does not meet typical foodservice health code.

### STANDARD SIZES

◇ 95 1/2"W x 35 3/4"H (19"W x 27 1/4"H service opening)

◇ 84"W x 35 3/4"H (17"W x 27 1/4"H service opening)  
(15" west coast restricted service opening also available)\*



\* Meets CA restricted opening requirement—under 432 square inches

### STANDARD FEATURES:


- ◇ Anodized aluminum extrusions and stainless steel combine to give you an attractive window that will not rust, pit or weather
- ◇ Fully assembled, pre-glazed and ready to install
- ◇ 1/4" Clear Tempered Glass
- ◇ Dark Bronze or Clear Anodized Aluminum
- ◇ Self latches every time it closes. Also includes a thumb turn lock, and night locking bar
- ◇ Track free bottom sill provides for a contaminant free surface. Angled toward outside for drainage toward exterior
- ◇ One year parts & labor limited warranty
- ◇ On-staff tech support / stocked parts / nationwide network of service providers.

### OPTIONAL FEATURES

- ◇ Powder Coat Paint—Tiger Drylac
- ◇ Custom Size
- ◇ Tinted Glazing
- ◇ Low E Glass
- ◇ 5/16 Safety Glass
- ◇ Stainless Steel Shelf to extend sill inside or out (13 ga.)
- ◇ Solid Glass Transom
- ◇ Split Transom for AA100 Fly Fans
- ◇ AA300 Heated Air Curtains
- ◇ Restriction Panel or Screen

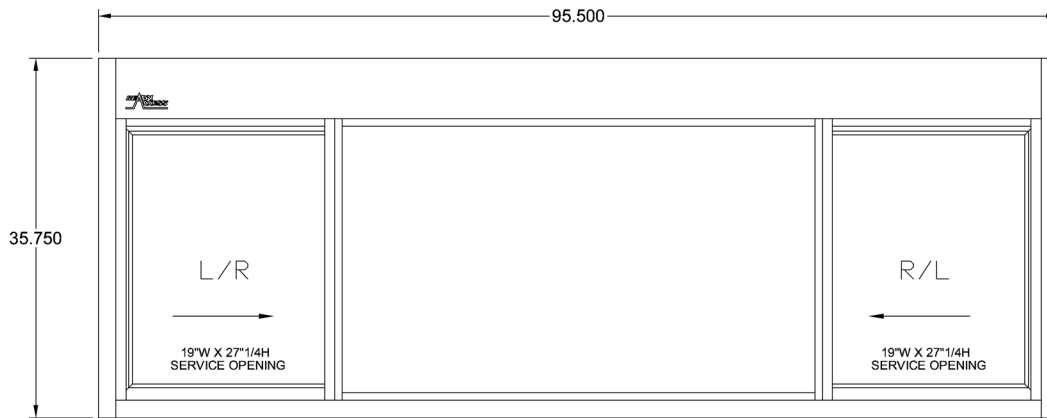

MODEL 550 - 95 1/2 X 35 3/4 H OUTSIDE VIEW

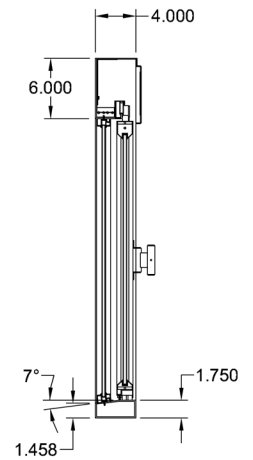

### ROUGH OPENING


#### 84" w x 35 3/4" h

- ◇ Masonry Rough Opening  
84 1/2" W x 36 1/4" H
- ◇ Glazing Rough Opening  
84 1/4" W x 36" H

#### 95 1/2" W x 35 3/4" H

- ◇ Masonry Rough Opening  
96" w x 36 1/4" H
- ◇ Glazing Rough Opening  
95 3/4" W x 36" H

Minimum distance from top of sill to floor (or per local code)

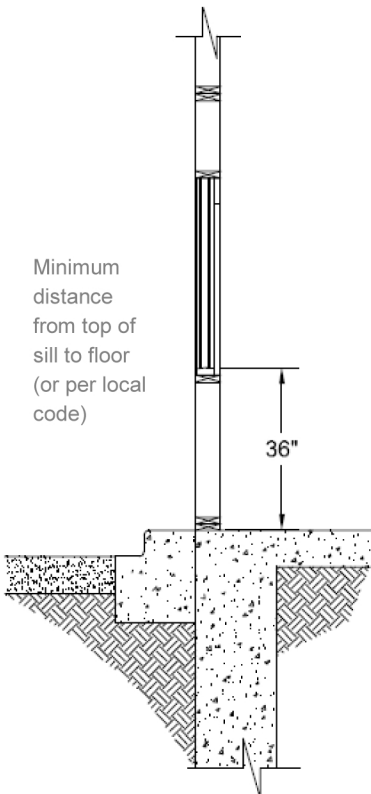

All windows are shipped completely pre-assembled, fully glazed and ready to install.

Installation / Owners manual can be retrieved online:  
[www.ready-access.com](http://www.ready-access.com)

- ◇ Installation illustrations are for reference only. Construction conditions and local codes prevail.
- ◇ Must be installed level, square and plumb.

**NO ELECTRIC REQUIREMENTS**

Manual Open / Self Close Window:

No Power Required