

Perfect for walk-up applications, the 650 features two service openings in one window. There is a fixed center pane with two independently operating panels that slide toward the center.

Choose the 3/4" glazing that best suits your project.

- ◇ **650 INSULATED** Dual pane 3/4" clear insulated tempered glass.
- ◇ **650 ENERGY SAVER** Dual pane 3/4" insulated low-e tempered (Solarban 70XL) glass maximizes energy-efficiency and staff comfort.
- ◇ **650 SECURITY** Choose Level 1 Bullet Resistant Lexan or Smash & Grab impact resistant glass.

Choose your mode of operation

- ◇ **MANUAL OPEN / SELF CLOSE**
Manual open, with patented hands-free gravity close. Economical and easy to maintain.
- ◇ **MANUAL OPEN / MANUAL CLOSE**
For complete control of the window, choose manual open/manual close. This mode of operation is best for paper transactions. Does not meet typical foodservice health code.



STANDARD SIZES

- ◇ 95 1/2"W x 35 3/4"H (19"W x 27 1/4"H service opening)
- ◇ 84"W x 35 3/4"H (17"W x 27 1/4"H service opening)
(15" west coast restricted service opening also available)*



* Meets CA restricted opening requirement—under 432 square inches

STANDARD FEATURES:


- ◇ Anodized aluminum extrusions and stainless steel combine to give you an attractive window that will not rust, pit or weather
- ◇ Fully assembled, pre-glazed and ready to install
- ◇ Dark Bronze or Clear Anodized Aluminum
- ◇ Self latches every time it closes. Also includes a thumb turn lock, and night locking bar
- ◇ Track free bottom sill provides for a contaminant free surface. Angled toward outside for drainage toward exterior
- ◇ One year parts & labor limited warranty
- ◇ On-staff tech support / stocked parts / nationwide network of service providers.

OPTIONAL FEATURES

- ◇ Powder Coat Paint—Tiger Drylac
- ◇ Custom Size
- ◇ Tinted Glazing
- ◇ Stainless Steel Shelf to extend sill inside or out (13 ga.)
- ◇ Solid Glass Transom
- ◇ Split Transom for AA100 Fly Fans
- ◇ AA300 Heated Air Curtains
- ◇ Restriction Panel or Screen

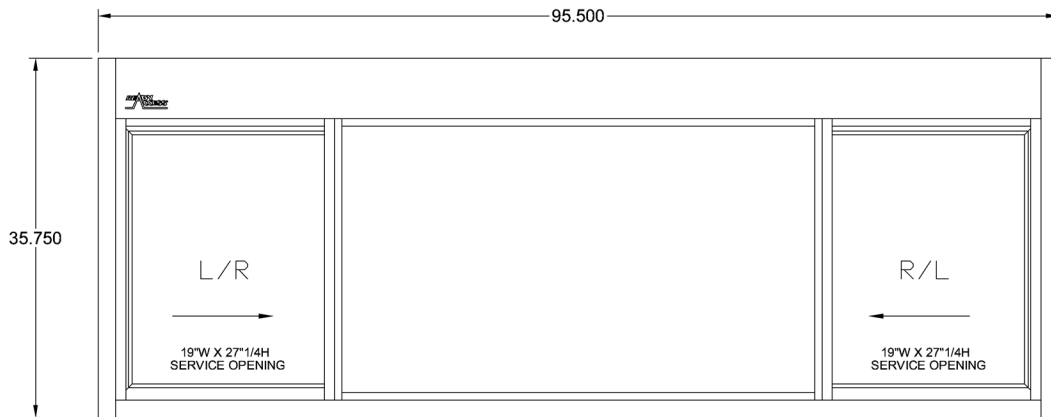

Model 650 - 95 1/2 X 35 3/4H OUTSIDE VIEW

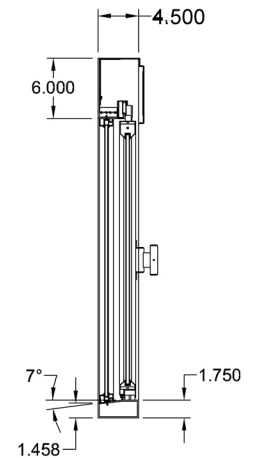

ROUGH OPENING


84" w x 35 3/4" h

- ◇ Masonry Rough Opening
84 1/2" W x 36 1/4" H
- ◇ Glazing Rough Opening
84 1/4" W x 36" H

95 1/2" W x 35 3/4" H

- ◇ Masonry Rough Opening
96" w x 36 1/4" H
- ◇ Glazing Rough Opening
95 3/4" W x 36" H

Minimum distance from top of sill to floor (or per local code)

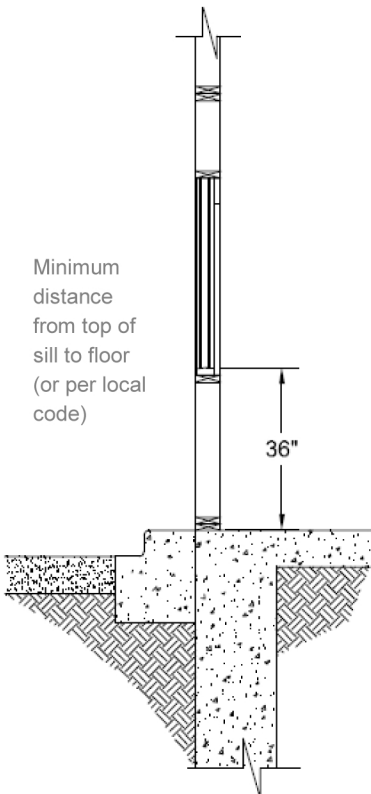

All windows are shipped completely pre-assembled, fully glazed and ready to install.

Installation / Owners manual can be retrieved online:
www.ready-access.com

- ◇ Installation illustrations are for reference only. Construction conditions and local codes prevail.
- ◇ Must be installed level, square and plumb.

NO ELECTRIC REQUIREMENTS

Manual Open / Self Close Window:

No Power Required