

This attractive insulated flush mount window is available for applications where a large service opening is preferred. Popular for walk up applications and drive thru. Bi-parting doors slide open to the sides.

### MANUAL OPEN / SELF CLOSE OPERATION

Manually open both doors with one hand. Doors part from the center and open simultaneously on smooth overhead rollers. The door panels automatically close and self latch with a gravity feed when the operator lets go.

### GLAZING

- ◇ 3/4" Clear Insulated tempered glass.
- ◇ 3/4" Solarban 70XL Insulated Low-E tempered glass to maximize energy-efficiency and staff comfort.



606-80 shown with clear anodized frame

### SIZE

**606-72**—Window Frame Size: 72"W x 41"H  
Service Opening: 30"w x 32.5"h  
Rough Opening: 72.5"w x 41.5"h

**606-80**—Window Frame Size: 79 1/2"W x 43 1/2"H  
Service Opening: 34"W x 34 3/4"H  
Rough Opening: 80"W x 44"H


### STANDARD FEATURES:

- ◇ Anodized aluminum extrusions and stainless steel combine to give you an attractive window that will not rust, pit or weather
- ◇ Fully assembled, pre-glazed and ready to install
- ◇ 3/4" Insulated Low E Solarban 70XL Tempered Glass
- ◇ Dark Bronze or Clear Anodized Aluminum Frame
- ◇ Latch so window cannot be opened from the outside, and thumb turn lock.
- ◇ Track free bottom sill
- ◇ One year parts & labor limited warranty
- ◇ On-staff tech support / stocked parts / nationwide network of service providers

### OPTIONAL FEATURES

- ◇ Powder Coat Paint—Tiger Drylac

606-80

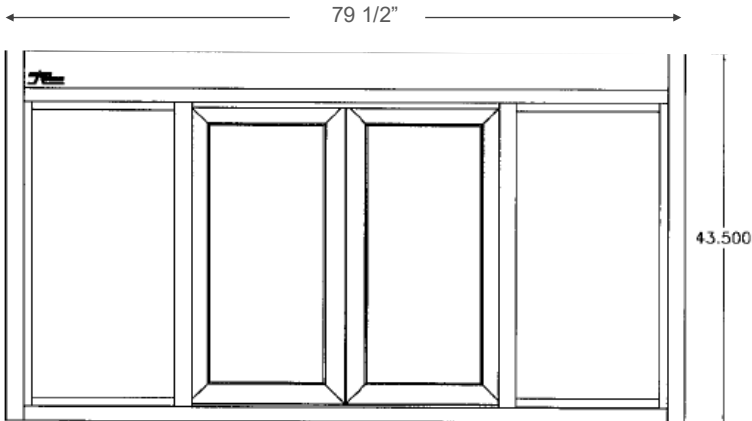

34"W X 34-3/4"H  
SERVICE OPENING

606-80

Window Frame Size: 79 1/2"W x 43 3/4"H

Service Opening: 34"W x 34 3/4"H

Rough Opening: 80"W x 44"H

FRAME DEPTH: 4 1/2"

606-72

Window Frame Size: 72"W x 41"H

Service Opening: 30"W x 32 1/2"H

Rough Opening: 72 1/2"W x 41 1/2"H

FRAME DEPTH: 4 1/2"

All windows ship completely pre-assembled, fully glazed and ready to install.

Installation / Owners manual can be retrieved online:

[www.ready-access.com](http://www.ready-access.com)

- ◇ Installation illustrations are for reference only. Construction conditions and local codes prevail.
- ◇ Must be installed level, square and plumb.
- ◇ Recommend approximately 36" from top of sill to interior finished floor (or per local code).
- ◇ Rough opening 1/2" larger than overall frame size recommended to allow 1/4" space all around for leveling.

### ELECTRIC REQUIREMENTS

#### FOR WINDOW

Manual Open/Self Close

No power required

